

Engine Cummins 6BTAA5.9-C180
Net Power 118 kW (160 hp) @ 2,200 rpm
Working Width 2,750 mm
Operating Weight 26,000 kg

626R ROLLER

 **LIUGONG**



TOUGH WORLD. TOUGH EQUIPMENT.

626R SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 2 / Stage II
Make	Cummins
Model	6BTAA5.9-C180
Gross Power	132 kW (177 hp) @ 2,200 rpm
Net Power	118 kW (160 hp) @ 2,200 rpm
Peak Torque	770 N·m
Number of Cylinders	6
Aspiration	turbocharged
Cooling Type	water

ELECTRICAL SYSTEM	
System Voltage	24 V

DRIVE TRAIN	
Theoretical Gradeability, without/ 20 % with vibration	
Transmission Type	power shift
Maximum Speed, fwd	20 km/h
Inside Turning Radius	<6,250 mm
Outside Turning Radius	<9,000 mm

AXLES	
Steering System	hydraulic
Steering Method	articulation
Steering Angle	±50°
Steering Relief Pressure	16 MPa

BRAKES	
Service Brake Type	caliper dry disc
Service Brake Actuation	air over hydraulic
Parking Brake Actuation	spring apply; hydraulic release



TIRES	
Tire Size	11.00 - 20 16 RP
Tire Tread	G - 1B

HYDRAULIC SYSTEM	
Main Pump Type	vane
Main Relief Pressure	16 MPa

OPERATING WEIGHTS	
Operating Weight with Ballast	26,000 kg

SERVICE CAPACITIES	
Fuel Tank	250 L
Engine Oil	14 L
Cooling System	32 L
Transmission and Torque Converter	27 L

OPTIONAL EQUIPMENT	
Rotary Beacon	
Backup Alarm	

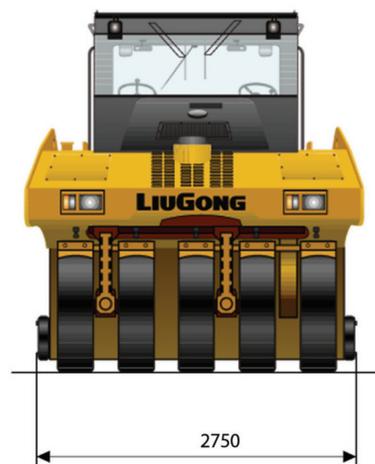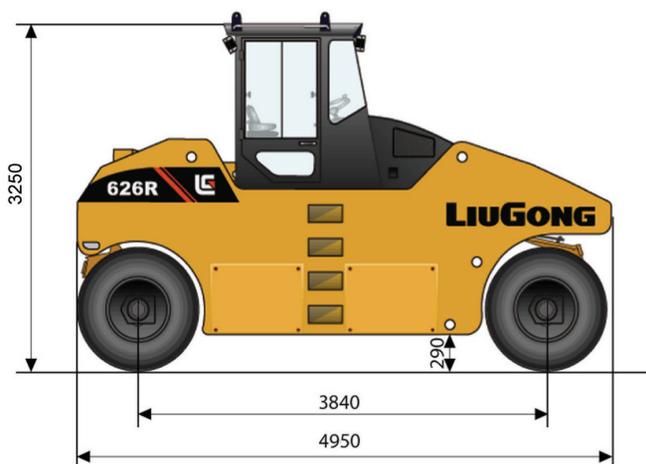

Unit: mm

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
 T: +86 772 3886124 E: overseas@liugong.com
 www.liugong.com

05/2014 Designed by Liugong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.